


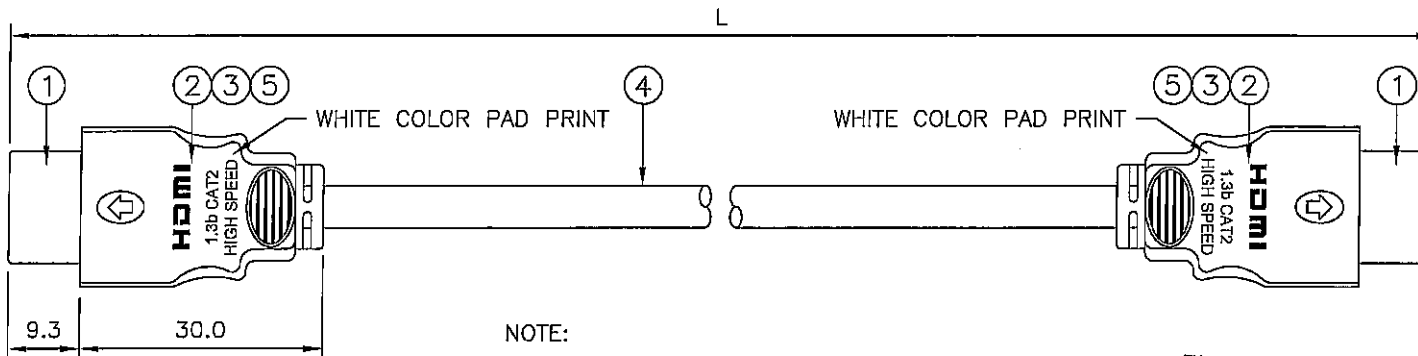


CUSTOMER'S APPROVAL: _____ DATE: _____
 FIRST ARTICLE SAMPLE REQUIRED: YES, NO.



PINOUT CONFIGURATION

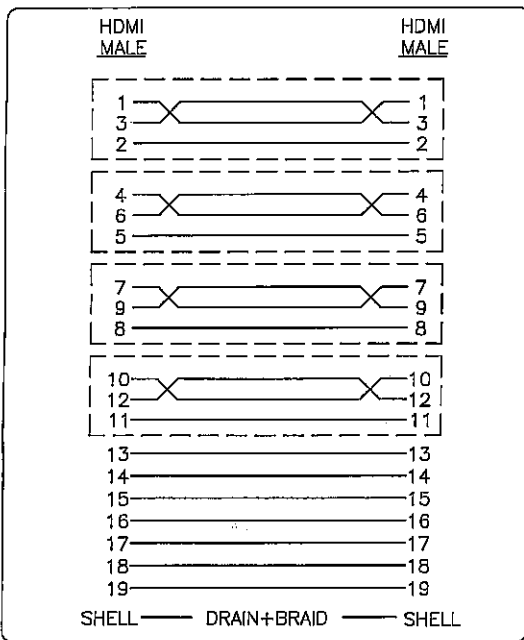

NOTE:

- THIS ITEM CONTAINS PAT. US 6,287,148 B1 RF-BLOK™ SHIELDING DESIGN.
- WIRE MARKING: EXTREME DISTANCE SINGLE LINK CABLE
- THE **HA-LEVEL-1** SERIES HDMI CABLES, MAXIMUM HIGH SPEED PERFORMANCE WILL BE UP TO 5 METERS LENGTH.

P/N	L±(mm)
HDHA-L1-0.5M	500±50
HDHA-L1-0.75M	750±50
HDHA-L1-1M	1000±50
HDHA-L1-2M	2000±50
HDHA-L1-3M	3000±100
HDHA-L1-5M	5000±150

UNIT: mm


ITEM	DESCRIPTION	QTY.	UNIT
1	HDMI TYPE A 19PIN MALE CONNECTOR W/GOLD PLATED PINS AND SHELL UL94V-0	2	PCS.
2	BLACK MOLDED PVC HOOD W/1080P	2	PCS.
3	PAT. US 6,287,148 B1 RF-BLOK™ SHIELDING METAL CAN	2	PCS.
4	TTL HA-LEVEL-1 SERIES (100Ω SHIELDED TMD5 PAIRS)x4 +7C WIRES+AL-FOIL+DRAIN+BRAID; BLACK PVC JACKET	SEE	DWG.
5	WHITE COLOR PAD PRINT	2	PCS.

REV.	DESCRIPTION	REVISED DATE	REVISED BY
A	CHANGE WIRE MARKING, ADD 3/5M LENGTH	JAN.19.08	STANLEY


TTL's P/N:	Revision:
SEE TABLE	A
RFQ number:	Drawing #: 97061201
Drawn by: STANLEY	Scale: None
Checked by:	Date: 06/12/2008

All information herein is proprietary and the exclusive property of Total Technologies, Ltd. Recipient agrees: 1) Not to disclose any of such information to others 2) Not to reproduce in whole or in part 3) To use such information only as directed by Total Technologies, Ltd. 4) Upon request, to return all copies of this document to Total Technologies, Ltd. Specifications are subject to change without prior notice.

CUSTOMER'S APPROVAL: _____ DATE: _____
 FIRST ARTICLE SAMPLE REQUIRED: YES, NO.

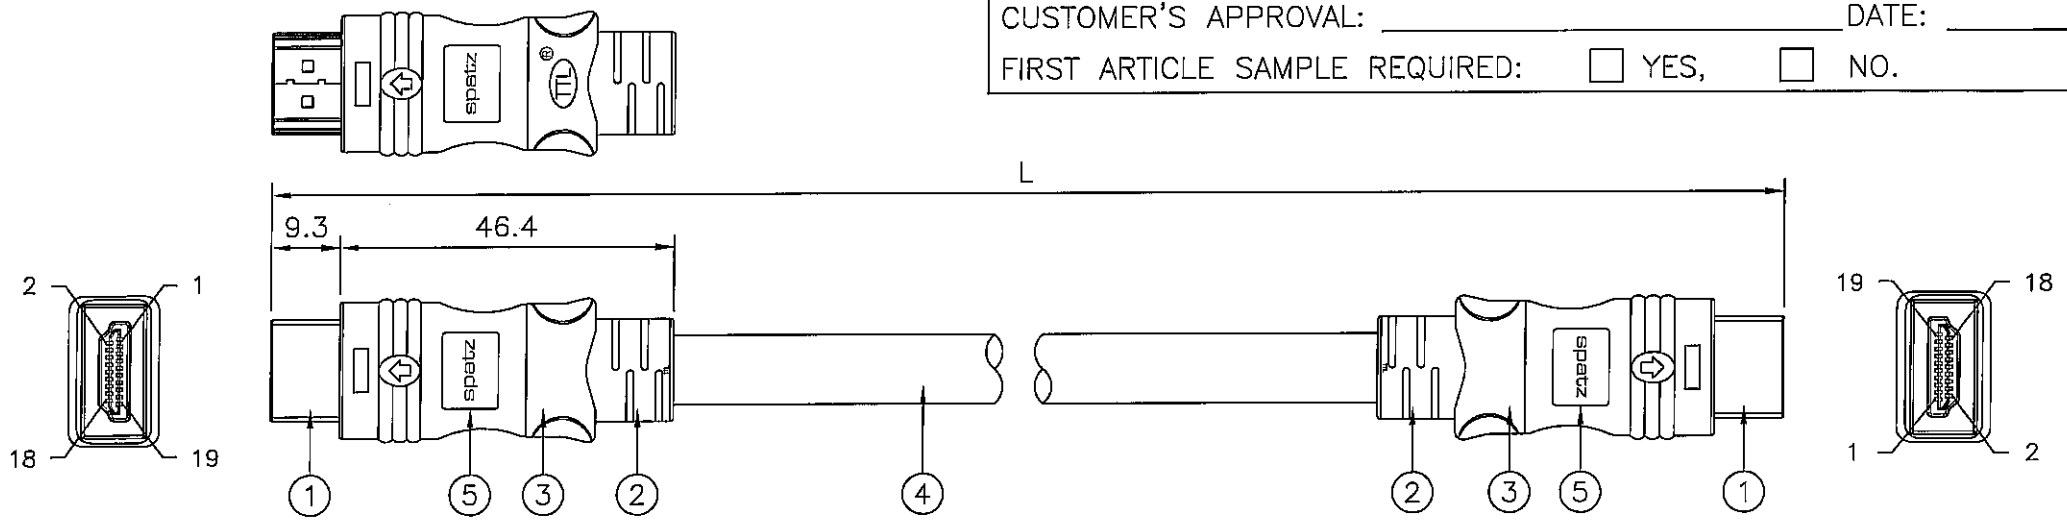

PINOUT CONFIGURATION

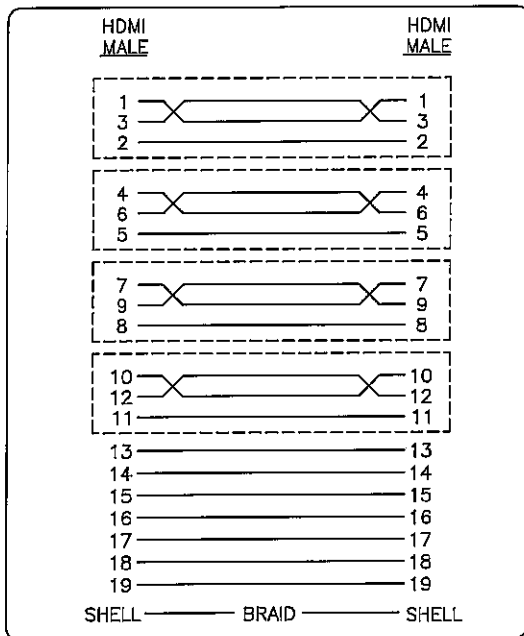

THIS Hi-PQ™ SERIES WIRE SPEC CAN SUPPORTS THE ELECTRICAL PERFORMANCE ABOVE 5 METERS, AS HEREUNDER.

NOTE:

1. THIS ITEM CONTAINS PAT. US 6,287,148 B1 RF-BLOK™ SHIELDING DESIGN.
2. WIRE MARKING:

⚠ **SPATZ** EXTREME DISTANCE SINGLE LINK CABLE **SPATZ**



P/N	HDMI LOGO	L±(mm)
SP-HIPQ-A-7.5M	W/LOGO	7500±200
SP-HIPQ-A-10M	W/LOGO	10000±250
SP-HIPQ-A-15M	W/LOGO	15000±250
SP-HIPQ-A-20M	W/O LOGO	20000±250
SP-HIPQ-A-30M	W/O LOGO	30000±250


UNIT: mm

ITEM	DESCRIPTION	QTY.	UNIT
1	HDMI TYPE A 19PIN MALE CONNECTOR W/GOLD PLATED PINS, UL94V-0	2	PCS.
2	BLACK MOLDED PVC HOOD	2	PCS.
3	PAT. US 6,287,148 B1 RF-BLOK™ NICKEL PLATED SHIELDING METAL CAN	2	PCS.
4	(100Ω SHIELDED TWINSTED PAIRS)x4+7C WIRE; AL-FOIL+85% BRAID; BLACK PVC JACKET	SEE	DWG.
5	SPATZ LOGO STICKER	4	PCS.


REVISED DETAILS		REVISED BY	Part number:	Revision:
REV.	DESCRIPTION	DATE	SEE TABLE	D
A	CHANGE GOLD PLATED SHELL TO NICKEL PLATED SHELL & LENGTH	FEB.12.07	STANLEY	RFQ number: Drawing #: 96020802
B	ADD LENGTH 10M	APR.10.07	STANLEY	Drawn by: STANLEY Scale: None
C	CHANGE WIRE MARKING	FEB.11.09	STANLEY	Checked by: Date: 02/08/2007
D	ADD LENGTH 7.5M	APR.03.09	STANLEY	

All information herein is proprietary and the exclusive property of Total Technologies, Ltd. Recipient agrees: 1) Not to disclose any of such information to others 2) Not to reproduce in whole or in part To use such information only as directed by Total Technologies, Ltd. 4) Upon request, to return all copies of this document to Total Technologies, Ltd. Specifications are subject to change without prior notice.

CUSTOMER'S APPROVAL: _____ DATE: _____
 FIRST ARTICLE SAMPLE REQUIRED: YES, NO.

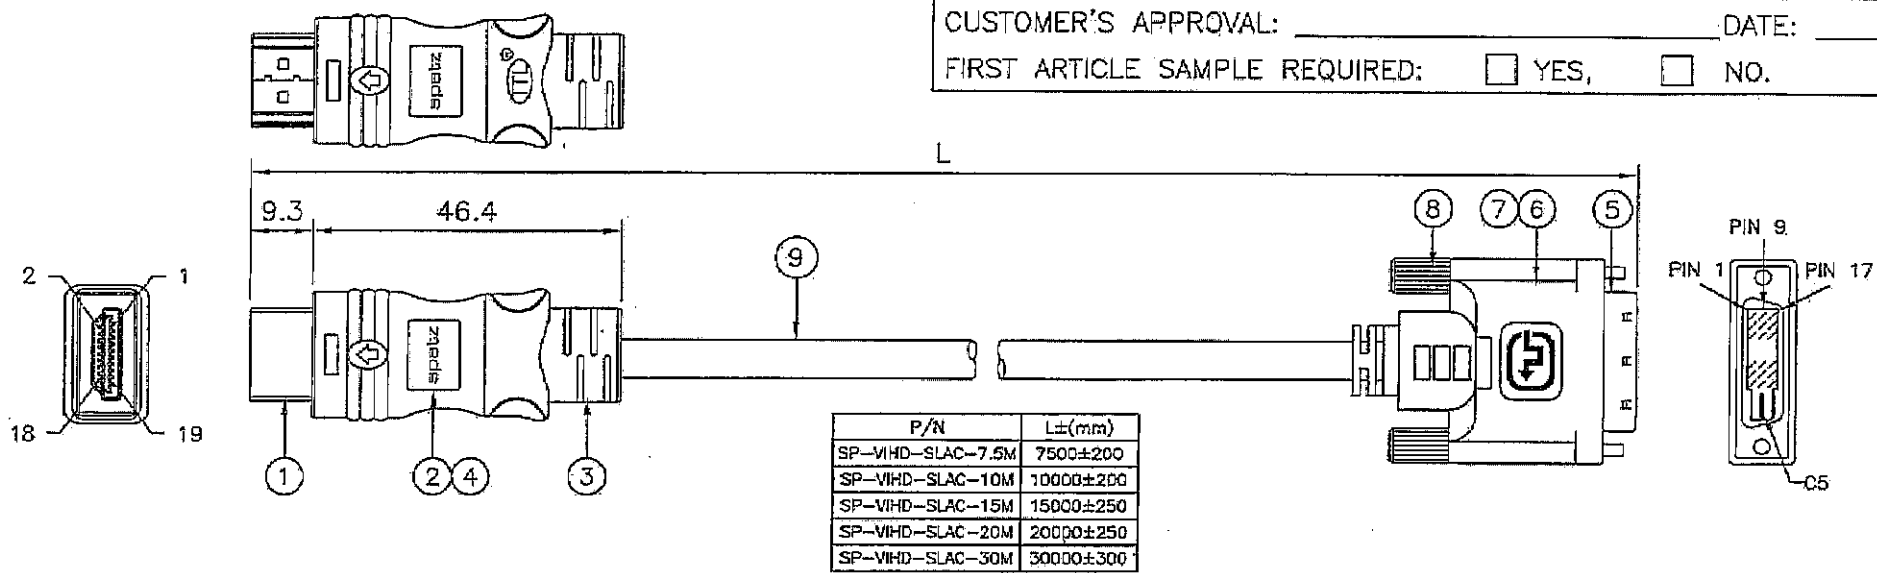

PINOUT CONFIGURATION

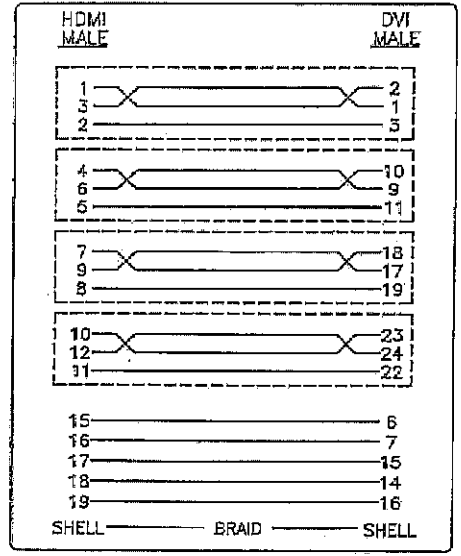

THIS SLAC™ WIRE SPEC CAN SUPPORTS THE ELECTRICAL PERFORMANCE ABOVE 5 METERS, AS HEREUNDER.
 NOTE:


1. THIS ITEM CONTAINS PAT. US 6,287,148 B1 RF-BLOK™ SHIELDING DESIGN.
2. WIRE MARKING:
 (TTL)® E193793 RJ AWM 20276 80°C 30V VW-1 TOTAL TECHNOLOGIES. LTD.®
 DVI SINGLE LINK DIGITAL SUPER LOW ATTENUATION CABLE (SLAC™) UNIT: mm

ITEM	DESCRIPTION	QTY.	UNIT
1	HDMI TYPE A 19PIN MALE CONNECTOR W/GOLD PLATED PINS UL94V-0	1	PCS.
2	PAT. US 6,287,148 B1 RF-BLOK™ NICKEL PLATING SHIELDING METAL CAN	1	PCS.
3	BLACK MOLDED PVC HOOD	1	PCS.
4	SPATZ LOGO STICKER	2	PCS.
5	DVI MALE CONNECTOR W/18 CONTACTS ONLY (18+1)	1	PCS.
6	TRANSPARENT MOLDED PVC HOOD	1	PCS.
7	PAT. US 6,287,148 B1 RF-BLOK™ SHIELDING METAL CAN	1	PCS.
8	TRANSPARENT #4/40 THUMBSCREW	2	PCS.
9	(100Ω SHIELDED TWIN PAIRS)x4+5C WIRE+AL-FOIL+85% BRAID; BLACK PVC JACKET	SEE	DWG.

REVISED DETAILS			REVISED BY	Part number:	Revision:
REV.	DESCRIPTION	DATE		SEE TABLE	ORIG.
				RFQ number:	Drawing #: 96101902
				Drawn by: STANLEY	Scale: None
				Checked by:	Date: 10/19/2007

All information herein is proprietary and the exclusive property of Total Technologies, Ltd. Recipient agrees: 1) Not to disclose any of such information to others 2) Not to reproduce in whole or in part 3) To use such information only as directed by Total Technologies, Ltd. 4) Upon request, to return all copies of this document to Total Technologies, Ltd. Specifications are subject to change without prior notice.

CUSTOMER'S APPROVAL: _____ DATE: _____
 FIRST ARTICLE SAMPLE REQUIRED: YES, NO.

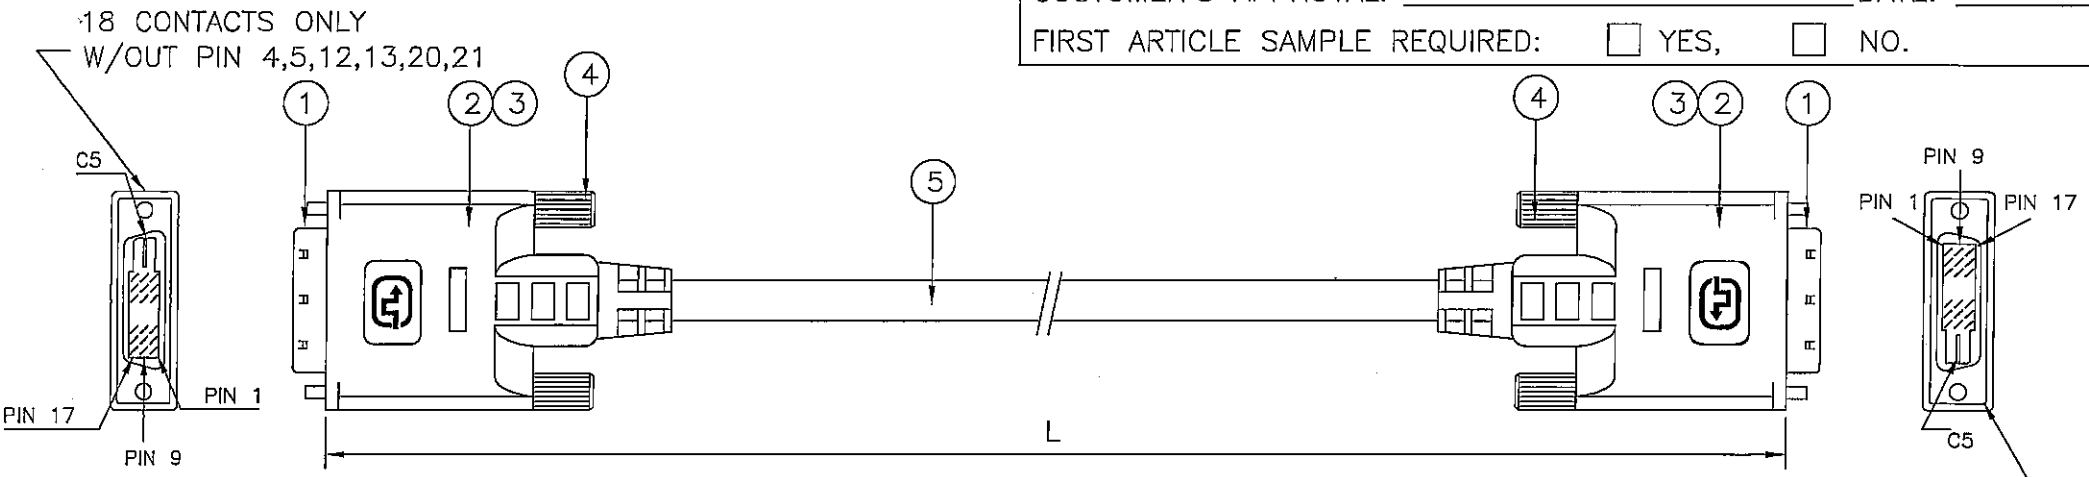

PINOUT CONFIGURATION

DVI MALE		DVI MALE
TMDS DATA 2- 1	---	1
TMDS DATA 2+ 2	---	2
TMDS DATA 2 SHIELD 3	---	3
DDC CLOCK 6	---	6
DDC DATA 7	---	7
TMDS DATA 1- 9	---	9
TMDS DATA 1+ 10	---	10
TMDS DATA 1 SHIELD 11	---	11
POWER +5V 14	---	14
GROUND 15 (+5V & HV SYNC.)	---	15
HOT PLUG DETECT 16	---	16
TMDS DATA 0- 17	---	17
TMDS DATA 0+ 18	---	18
TMDS DATA 0 SHIELD 19	---	19
TMDS CLOCK SHIELD 22	---	22
TMDS CLOCK+ 23	---	23
TMDS CLOCK- 24	---	24
SHELL	BRAID	SHELL

NOTE:

- THIS ITEM CONTAINS PAT. NO:US 6,287,148 B1 RF-BLOK™ SHIELDING DESIGN
- WIRE MARKING:

spatz EXTREME DISTANCE SINGLE LINK CABLE **spatz**

18 CONTACTS ONLY
 W/OUT PIN 4,5,12,13,20,21

P/N	L±(mm)
DVIMM-SLAC-5M	5000±150
DVIMM-SLAC-10M	10000±200
DVIMM-SLAC-15M	15000±250
DVIMM-SLAC-20M	20000±250
DVIMM-SLAC-30M	30000±300

UNITS:mm

ITEM	DESCRIPTION	QTY.	UNIT
1	DVI MALE CONNECTOR W/ 18 CONTACTS ONLY(18+1)	2	PCS
2	TRANSPARENT MOLDED PVC HOOD	2	PCS
3	PAT.US 6,287,148 B1 RF-BLOK™ SHIELDING METAL CAN	2	PCS
4	TRANSPARENT COLOR #4/40 THUMBSCREW	4	PCS
5	UL20276 (24AWGx1PAIR+DRAIN+AL+MYLAR)x4C 28AWGx5C+AL-FOIL+BRAID OVERALL; BLACK PVC JACKET	SEE	DWG


REV.	DESCRIPTION	DATE	REVISED BY
A	CHANGE CABLE COLOR & ADD LENGTH 30M	FEB.14.06	STANLEY
B	CHANGE WIRE MARKING	NOV.21.08	STANLEY

Part number: DVIMM-SLAC-L	Revision: B
RFQ number:	Drawing #: 041220-2
Drawn by: X.X.WANG	Scale: None
Checked by:	Date: 12/20/2004


All information herein is proprietary and the exclusive property of Total Technologies, Ltd. Recipient agrees: 1) Not to disclose any of such information to others 2) Not to reproduce in whole or in part 3) To use such information only as directed by Total Technologies, Ltd. 4) Upon request, to return all copies of this document to Total Technologies, Ltd. Specifications are subject to change without prior notice.

CUSTOMER'S APPROVAL: _____ DATE: _____

FIRST ARTICLE SAMPLE REQUIRED: YES, NO.

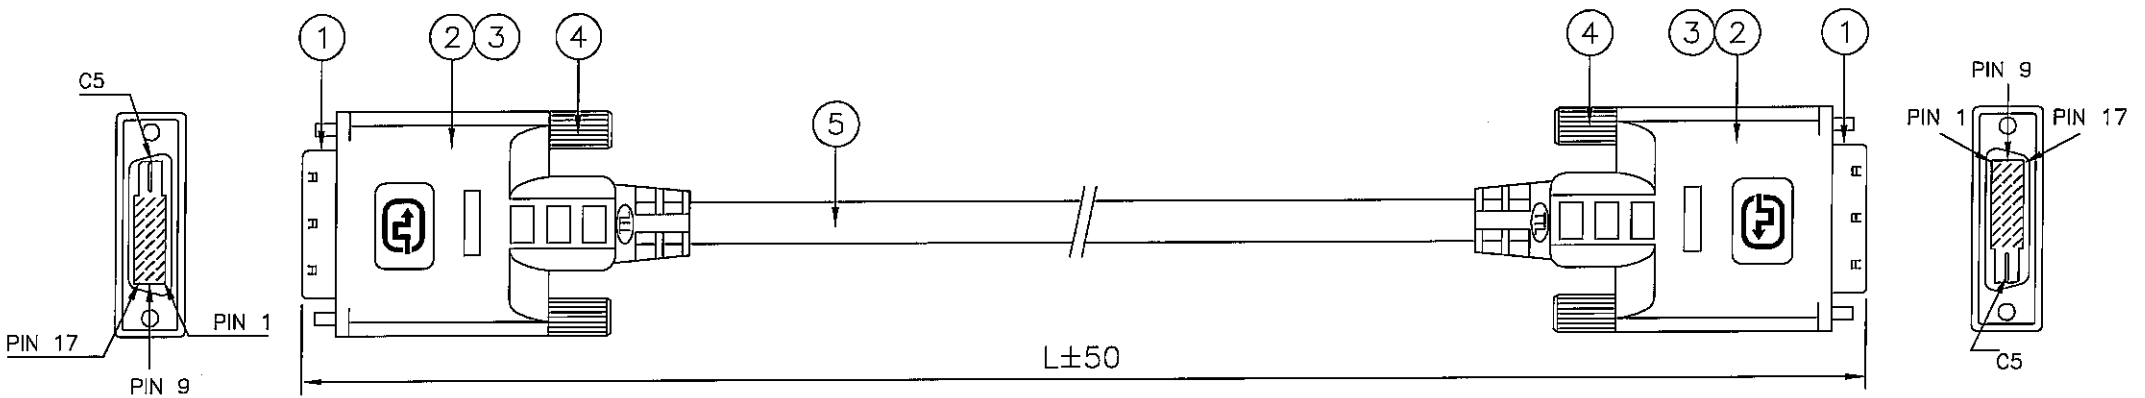

PINOUT CONFIGURATION

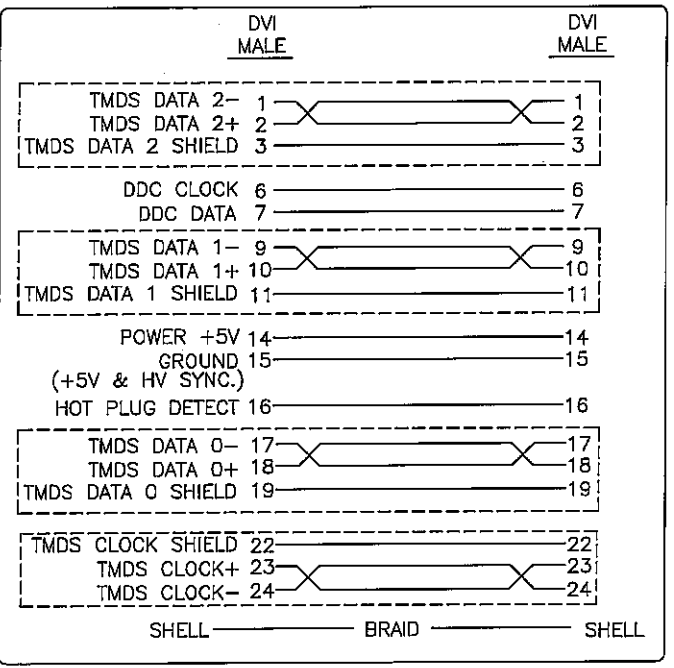

NOTE:

1. THIS ITEM CONTAINS PAT. US 6,287,148 B1 RF-BLOK™ SHIELDING DESIGN.

D 2. WIRE MARKING:

spatz EXTREME DISTANCE SINGLE LINK CABLE **spatz**

P/N	L
SP-DVI-SDM/SDM-1M	1000
SP-DVI-SDM/SDM-2M	2000
SP-DVI-SDM/SDM-5M	5000
SP-DVI-SDM/SDM-10M	10000

UNIT: mm


ITEM	DESCRIPTION	QTY.	UNIT
1	DVI MALE CONNECTOR	2	PCS.
2	TRANSPARENT MOLDED PVC HOOD	2	PCS.
3	RF-BLOK™	2	PCS.
4	TRANSPARENT COLOR #4/40 THUMBSCREW	4	PCS.
5	UL20276 (28AWGx1PAIR+AL-FOIL+DRAIN)x4C +(28AWG WIRE)x5C+AL-FOIL/MYLAR+BRAID OVERALL; BLACK COLOR PVC JACKET	SEE	DWG.

B

REVISED DETAILS			TTL P/N:	Revision:
REV.	DESCRIPTION	DATE	SP-DVI-SDM/SDM-L	D
A	ADD LENGTH TABLE	JUN.01.06	RFQ number:	Drawing #: 95040602
B	CHANGE CABLE COLOR	JUN.23.06	Drawn by: STANLEY	Scale: None
C	ADD LENGTH 10M	FEB.08.07	Checked by:	Date: 04/06/2006
D	CHANGE WIRE MARKING	APR.06.09		

All information herein is proprietary and the exclusive property of Total Technologies, Ltd. Recipient agrees: 1) Not to disclose any of such information to others 2) Not to reproduce in whole or in part To use such information only as directed by Total Technologies, Ltd. 4) Upon request, to return all copies of this document to Total Technologies, Ltd. Specifications are subject to change without prior notice.

CUSTOMER'S APPROVAL: _____ DATE: _____
 FIRST ARTICLE SAMPLE REQUIRED: YES, NO.

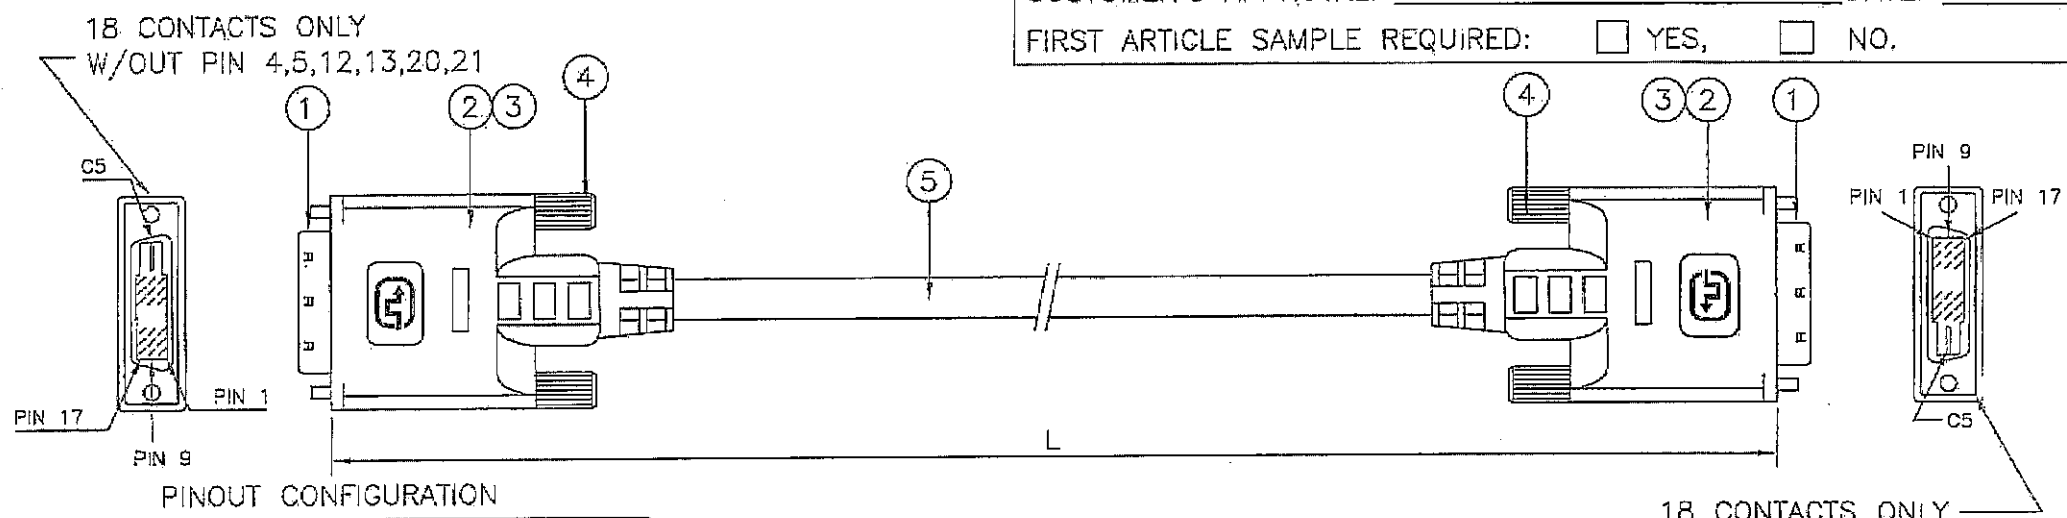

PINOUT CONFIGURATION

18 CONTACTS ONLY
 W/OUT PIN 4,5,12,13,20,21

DVI MALE		DVI MALE	
TMDS DATA 2-	1	1	1
TMDS DATA 2+	2	2	2
TMDS DATA 2 SHIELD	3	3	3

DDC CLOCK	6	6	6
DDC DATA	7	7	7

TMDS DATA 1-	9	9	9
TMDS DATA 1+	10	10	10
TMDS DATA 1 SHIELD	11	11	11

POWER +5V	14	14	14
(+5V & HV SYNC.)	15	15	15
HOT PLUG DETECT	16	16	16

TMDS DATA 0-	17	17	17
TMDS DATA 0+	18	18	18
TMDS DATA 0 SHIELD	19	19	19

TMDS CLOCK SHIELD	22	22	22
TMDS CLOCK+	23	23	23
TMDS CLOCK-	24	24	24

SHELL		BRAID	SHELL

NOTE:

- THIS ITEM CONTAINS PAT. NO:US 6,287,148 B1 RF-BLOK™ SHIELDING DESIGN
- WIRE MARKING:

ⓉⓉⓁ[®] E193793R, AWM 20276 80°C 30V VW-1 TOTAL TECHNOLOGIES LTD.®
 DVI SINGLE LINK DIGITAL SUPER LOW ATTENUATION CABLE (SLAC™)

UNIT: mm

P/N	L±(mm)
SP-DVIS-40M	40000±250
SP-DVIS-50M	50000±250

ITEM	DESCRIPTION	QTY.	UNIT
1	DVI MALE CONNECTOR W/18 CONTACTS ONLY (18+1)	2	PCS.
2	TRANSPARENT MOLDED PVC HOOD	2	PCS.
3	PAT.US 6,287,148 B1 RF-BLOK™ SHIELDING METAL CAN	2	PCS.
4	TRANSPARENT COLOR #4/40 THUMBSCREW	4	PCS.
5	UL20276 (24AWGx1PAIR+DRAIN+AL+MYLAR)x4C+28AWGx5C +AL-FOIL+BRAID OVERALL; BLACK PVC JACKET	SEE	DWG.



REVISED DETAILS		REVISED BY
REV.	DESCRIPTION	DATE

Part number: SP-DVIS-L	Revision: ORIG.
RFQ number:	Drawing #: 96041103
Drawn by: STANLEY	Scale: None
Checked by:	Date: 04/11/2007

All information herein is proprietary and the exclusive property of Total Technologies, Ltd. Recipient agrees: 1) Not to disclose any of such information to others 2) Not to reproduce in whole or in part 3) To use such information only as directed by Total Technologies, Ltd. 4) Upon request, to return all copies of this document to Total Technologies, Ltd. Specifications are subject to change without prior notice.

ALL MATERIAL ARE RoHS AND CALIFORNIA PROP.65 COMPLIANT

CUSTOMER'S APPROVAL: _____ DATA: _____
 FIRST ARTICLE SAMPLE REQUIRED: YES, NO.

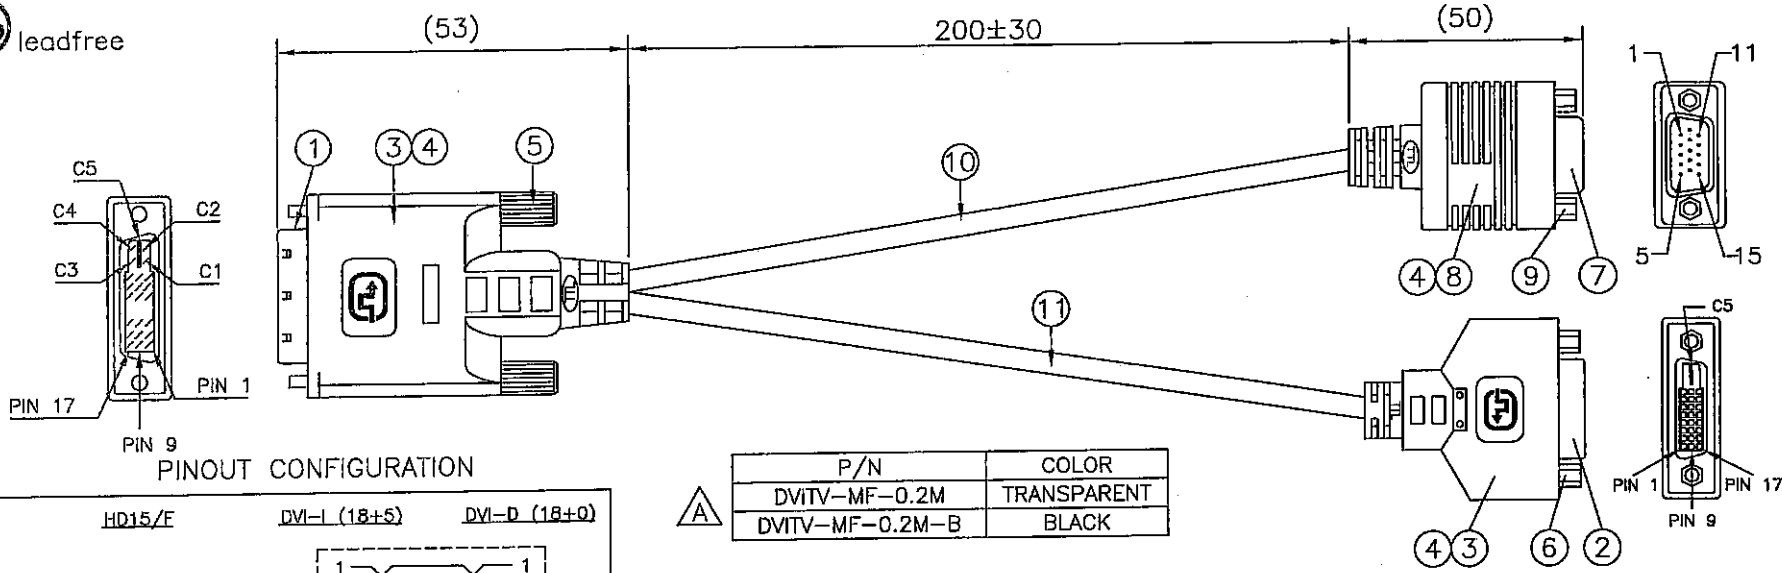


PINOUT CONFIGURATION

P/N	COLOR
DVITV-MF-0.2M	TRANSPARENT
DVITV-MF-0.2M-B	BLACK

NOTE:
 1. THIS ITEM CONTAINS PAT. US 6,287,148 B1 RF-BLOK™ SHIELDING DESIGN.

UNIT: mm

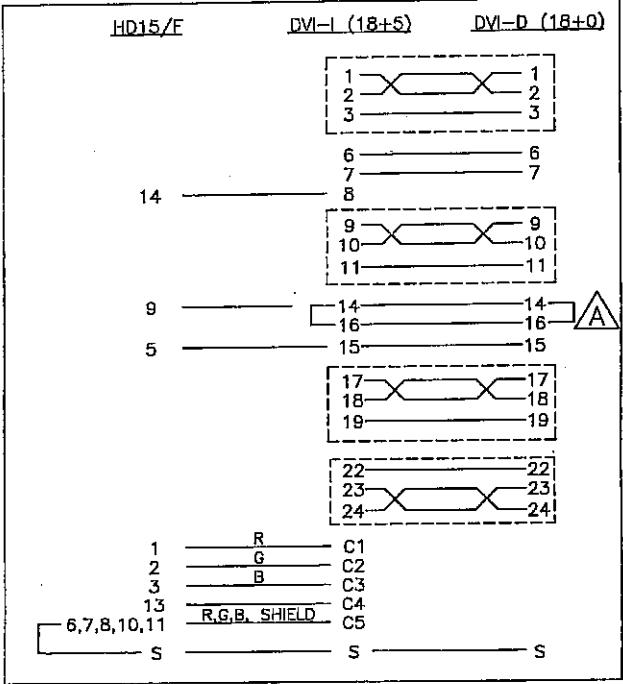

ITEM	DESCRIPTION	QTY.	UNIT.
1	DVI-I MALE CONNECTOR (18+5)	1	PCS.
2	DVI-D FEMALE CONNECTOR (18+0), C1-C5 NO PINS	1	PCS.
3	COLOR MOLDED PVC HOOD	2	PCS.
4	PAT.US 6,287,148 B1 RF-BLOK™ SHIELDING METAL CAN	3	PCS.
5	COLOR MOLDED #4/40 THUMBSCREW	2	PCS.
6	#4/40 HEXNUT	2	PCS.
7	HD-15P FEMALE CONNECTOR	1	PCS.
8	COLOR MOLDED PVC HOOD	1	PCS.
9	#4/40 HEXNUT	2	PCS.
10	UL20276 (28AWG COAX W/SPIRAL SHIELD NO JACKET)x3C+ (28AWG WIRE)x4C; AL-FOIL/MY+BRAID 85% OVERALL COLOR PVC JACKET, OD:6.2mm	SEE	DWG.
11	UL20276 (28AWGx1PAIR+AL-FOIL+DRAIN)x4C +(28AWG WIRE)x5C+AL-FOIL/MY+BRAID 85% OVERALL COLOR PVC JACKET, OD:7.0mm	SEE	DWG.

REVISED DETAILS			REVISED BY
REV.	DESCRIPTION	DATE	
A	CHANGE PINOUT AND COLOR	02.06.06	STANLEY

TTL P/N:	Revision:
SEE TABLE	A
RFQ number:	Drawing #: 041220-7
Drawn by: X.X.WANG	Scale: None
Checked by:	Date: 12/20/2006

All information herein is proprietary and the exclusive property of Total Technologies, Ltd. Recipient agrees: 1) Not to disclose any of such information to others 2) Not to reproduce in whole or in part. 3) To use such information only as directed by Total Technologies, Ltd. 4) Upon request, to return all copies of this document to Total Technologies, Ltd. Specifications are subject to change without prior notice.