



VGASCALE

Operation Manual



TABLE OF CONTENTS

1. Introduction	1
2. Main Features	1
3. Operation Controls and Functions	1
3.1 Front Panel.....	2
3.2 Rear Panel.....	2
4. OSD Operation	3
5. Connection and Installation	4
6. Specifications	4
7. Support Resolution	4

1. Introduction


This Scaler Box is designed to upscale PC/HD input sources to PC/HD output of wide-range PC/HD resolutions; the resolution is up to WUXGA/1080p. This unit has a comprehensive OSD menu that allows user to select a variety of output resolutions and adjust for best picture quality.

2. Main Features

- Scales any PC/HD resolutions to PC (VGA ~ WUXGA)/HD (480i ~ 1080p) resolutions.
- Provides output picture adjustment on contrast, brightness, hue, saturation, sharpness, RGB (color tone) level and aspect ratio size.
- Supports high resolution output:
PC: VGA, SVGA, XGA, SXGA, UXGA, WXGA, WSXGA, WUXGA.
SD/HD: 480i, 576i, 480p, 576p, 720p, 1080i and 1080p.
- Supports YPbPr/RGBHV input/output.


3. Operation Controls and Functions

3.1 Front Panel

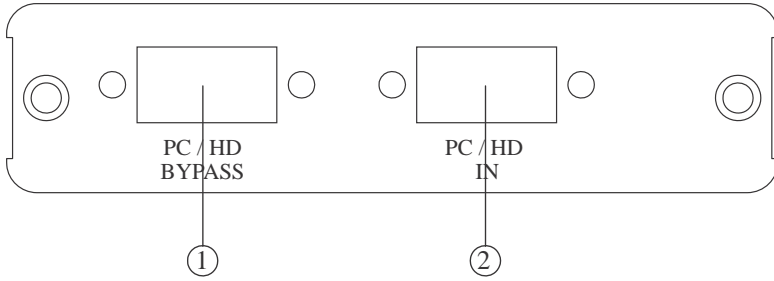

- ① PC/HD Bypass: Bypass the PC/HD input signal.
- ② Input: Connect the PC input D-Sub (15-pin) port to the D-Sub output port of your source equipment such like PC.

3.2 Rear Panel

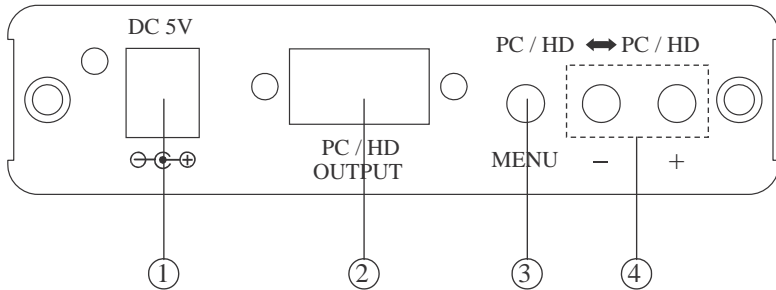

- ① Power: Plug the 5VDC power supply into the unit and connect the adaptor to AC wall outlet.
- ② PC/HD Output: Connect the PC output D-Sub (15-pin) port to the D-Sub input port of your display.
- ③ Menu Button: Press the MENU button to bring up OSD operation menu. (See section "4. OSD Operation" for reference.)
- ④ +/- Button:
 - 1 On the first tier of OSD menu, use + and - buttons to move up/down the highlight item for selection.
 - 2 Once the desired option is selected, use + and - buttons to toggle between setting values.

Note: Reset: Press [MENU] and then [-] to switch to 480p mode.
Press [MENU] and the [+] to switch to XGA mode.

4. OSD Operation

1 st Tier Option	2 nd Tier Option	Adjustment
CONTRAST	-	0 ~ 100 of Contrast Level
BRIGHTNESS	-	0 ~ 100 of Brightness Level
FINETUNE	- HUE	0 ~ 100 of Hue Level
	- SATURATION	0 ~ 100 of Saturation Level
	- SHARPNESS	0 ~ 100 of Sharpness Level
	- EXIT	Back to 1 st Tier
COLOR	- RED	0 ~ 100 of Red Color Level
	- GREEN	0 ~ 100 of Green Color Level
	- BLUE	0 ~ 100 of Blue Color Level
	- EXIT	Back to 1 st Tier
SIZE	-	FULL / OVERSCAN / UNDERSCAN / LETTERBOX / PANSKAN
OUTPUT	-	NATIVE / VGA / SVGA / XGA / SXGA / UXGA / 480i / 480p / 720p@60Hz / 1080i@60Hz / 1080p@60Hz / 576i / 576p / 720p@50Hz / 1080i@50Hz / 1080p@50Hz / WXGA / WSXGA / WUXGA
OSD	- HPOSITION	0 ~ 100 of OSD Horizontal Position
	- VPOSITION	0 ~ 100 of OSD Vertical Position
	- TIMER	0 ~ 100 of OSD Existing Time (sec.)
	- BACKGROUND	0 ~ 100 of OSD Transparent Level
	- EXIT	Back to 1 st Tier
INFORMATION	-	SOURCE (Input Interface) INPUT (Input Resolution) OUTPUT (Output Resolution) VERSION (Firmware Version)
EXIT	-	Close OSD Menu

5. Connection and Installation



6. Specifications

Input ports	1 x PC
Output port	1 x PC
Power Supply	5V/2.6A DC (US/EU standards, CE/FCC/UL certified)
Dimensions (mm)	157(D) x 102(W) x 25(H)
Weight(g)	332
Chassis Material	Aluminum
Silk Skin Color	Silver
Operating Temperature	Operating from 0°C ~ 40°C

7. Supported I/O Resolutions

	PC INPUT	PC OUTPUT
	PC/HD	PC/HD
480I/576I (NTSC/PAL)	✓	✓
480P/576P	✓	✓
720P@(50/60)	✓	✓
1080I@(25/30)	✓	✓
1080P@(50/60)	✓	✓
VGA@(60/72/75/85)	✓	✓
SVGA@(56/60/72/75/85)	✓	✓
XGA@(60/70/75/85)	✓	✓
SXGA@(60/75/85)	✓	✓
UXGA@60	✓	✓
WXGA@60(1280x800)	✓	✓
WSXGA@60(1680x1050)	✓	✓
WUXGA@60(1920x1200)	✓	✓